



Tracer Wire

14 AWG Copper Clad Steel, PE30


Description: Flexible Tracer Wire is a Solid Copper Clad Steel, PE Insulated Conductor, suitable for detecting buried facilities. Rated for direct bury. Wire is UL Rated.

Measurements:

Conductor: 14 AWG Copper Clad Steel, Solid
Insulation: High Molecular Weight Polyethylene
0.030" Nominal Thickness
Copper OD: 0.064" Nominal
Finished OD: 0.126" Nominal
Weight: 14.85 lbs/1000'

Properties:

Temperature: -20°C to 80°C
Operating Voltage: 30V
Insulation Color: Various Colors Available
Break Load: 175-177 LBS
Tensile Strength: 54,251-55,000 PSI

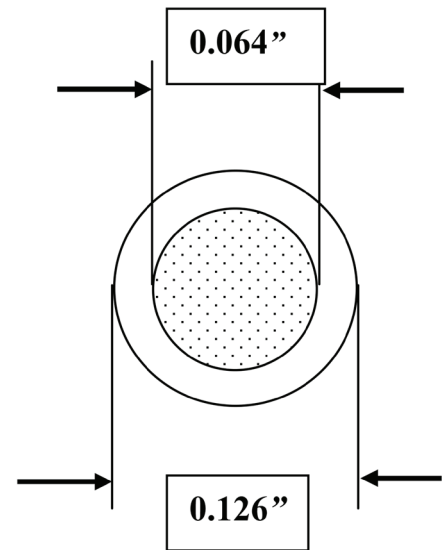

Print Legend:

AGAVE WIRE – 12 AWG PE(30) COPPER CLAD STEEL TRACER WIRE (UL) 30V E246360

Manufactured in the USA by:



AGAVE WIRE LTD

V0818