




IN-BUILDING RISERS

FEATURES:

- Available in 2 1/2", 3", 4", 6", 8" 10" & 12" pipe diameters (304 Stainless Steel Sch 10) and various inlet and outlet connections (see charts below)
- Standard vertical and horizontal measurements - 6'
- Special dimensions have quick (3-5 day) turnaround
- UL listed under TMC (HKQA. EX16200) from 2' to 20' in length
- Rated at 200psi
- Lead Free
- Conforms to NFPA 24 Section 8-3.2
- No welds under foundation in 4", 6", and 8"
- Grooved ends come with cap & coupling for testing
- Grooved x Grooved Inlet – available 10" and 12".

Outlet

Inlet

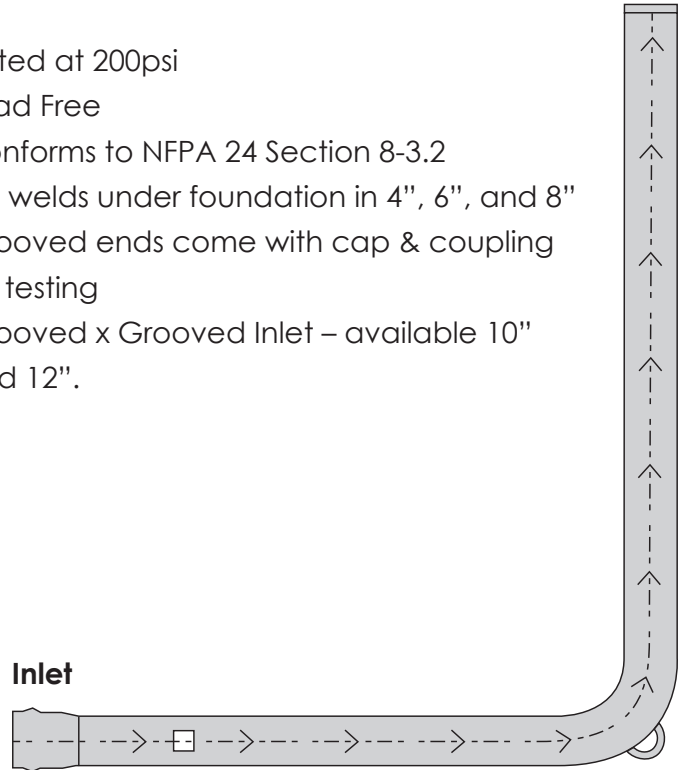

END CONNECTIONS:

Inlet (Horizontal): Mates with ductile iron pipe and AWWA C900 Pipe (PVC pipe with ductile iron pipe equivalent OD's) or AWWA C-207 flanged ends.

Outlet (Vertical): Meets AWWA C-606 dimensions for roll grooved pipe or AWWA C-207 flanged ends.

Inlet (Horizontal)

2 1/2 3 4 6 8 10 12 (In inches)

CIPS (C900)			X	X	X		
Flanged	X	X	X	X	X	X	X


Outlet (Vertical)

2 1/2 3 4 6 8 10 12 (In inches)

Grooved	X	X	X	X	X	X	X
Flanged	X	X	X	X	X	X	X

Contact our sales department Monday through Friday from 8 AM to 5 PM (CST) at 972.446.1655, or by email at sales@egwusa.com. We're also online at www.egwwaterandplumbing.com.

IN-BUILDING RISER

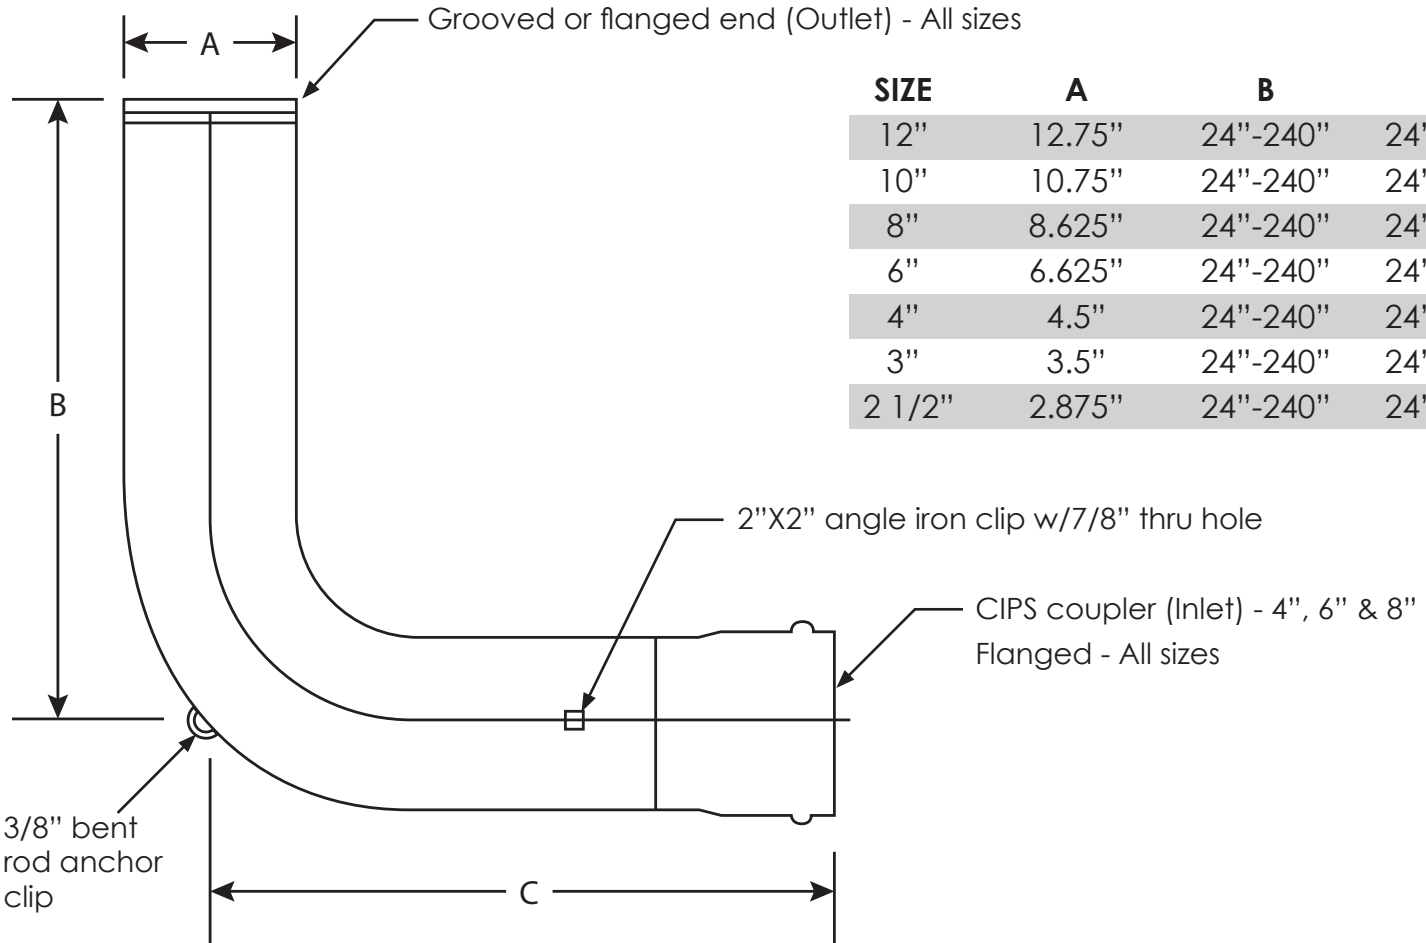

SIZE	A	B	C
12"	12.75"	24"-240"	24"-240"
10"	10.75"	24"-240"	24"-240"
8"	8.625"	24"-240"	24"-240"
6"	6.625"	24"-240"	24"-240"
4"	4.5"	24"-240"	24"-240"
3"	3.5"	24"-240"	24"-240"
2 1/2"	2.875"	24"-240"	24"-240"

MATERIAL: Type 304 stainless steel SCH10 or SCH40

FLANGE INFO:

2.87510" 150# flange per ASME B16.5 for 10" & 12"
150# x 1/2" plate flange for 2-1/2" thru 8" sizes

UL listed under TMC - HKQA.EX16200